

Roofit.Solar

Velario Slim

T-2x12/120

CP/0.5/GLO/9005/SG

Extremely Weatherproof

Our solar roof is equipped to withstand any weather condition, including snow, ice, hail, and wind.

2-in-1 solution

Combining roof and solar panel into one product (2-in-1) reduces material and labor costs for both manufacturing and installation.

Built to last

Premium quality materials and a strong metal backsheet.

Warranty

25-year power warranty and 10-year product warranty.

Ideal for Sloped Roofs

Ideal photovoltaic solution for sloped roofs with minimum pitch of 10°.

Designed in Europe.

We commit to the highest quality and European standards in the production and installation of our solar roofs.

Tried-and- tested

Installed using traditional well-known double-lock standing seam roofing technology.

Timeless design

Accepted by authorities for protected and heritage buildings.



Roofit.Solar

Contact Roofit Solar Energy OÜ
Härgmäe 21, Tallinn 13525, Estonia
<http://roofit.solar>
info@roofit.solar

Working Conditions

Maximum System Voltage	1000 V DC
Ambient Temperature	-40 °C ... +40 °C
Maximum Series Fuse Rating	25A
Safety Class	Class II
Tested Positive Load	6000 Pa = 610 kg/m ²
Tested Negative Load	2400 Pa
Impact Resistance	Hailstone up to 25 mm in size
Minimum Roof Slope	10 degrees

Mechanical Specifications

Cells	210 mm monocrystalline TOPCon 2x12 configuration
Encapsulant	POE
Front glass	3.2 mm tempered low-iron glass
Roofing material	0.5 mm steel 255 g/m ² zinc-aluminium galvanized 65 µm Colorcoat Prisma RAL 9005 Gloss level 40 GU
Junction boxes	2 bypass diodes, IP68, potted
Connectors	Stäubli MC4-Evo 2
Cables	4 mm ² H1Z2Z2-K solar cable length 500 mm
Effective roof coverage	2019 mm x 471 mm
Mounting method	Double Seam
Weight	13.5 kg (pc) = 14.2 kg/m ² (installed)

Packing

Packing Configuration	40 modules per pallet
Pallet (LxWxH)	2335 x 1105 x 840 mm
Pallet weight	650 kg

Certification

IEC 61215-1:2021 (PV Module Reliability)

IEC 61730-1:2023 (PV Module Safety)

EN 13501-5:2016 (Fire safety)

Broof (t1) by GTC



Broof (t2) by Eurofins Expert Services Oy



Expert Services

CAUTION: PLEASE READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

© 2025 Roofit Solar Energy OÜ. All Rights Reserved. Specifications subject to technical changes. Version number: 2025-03-V1

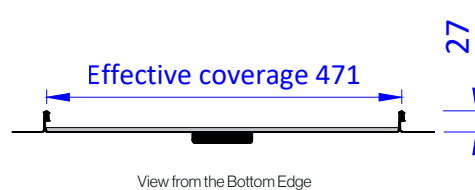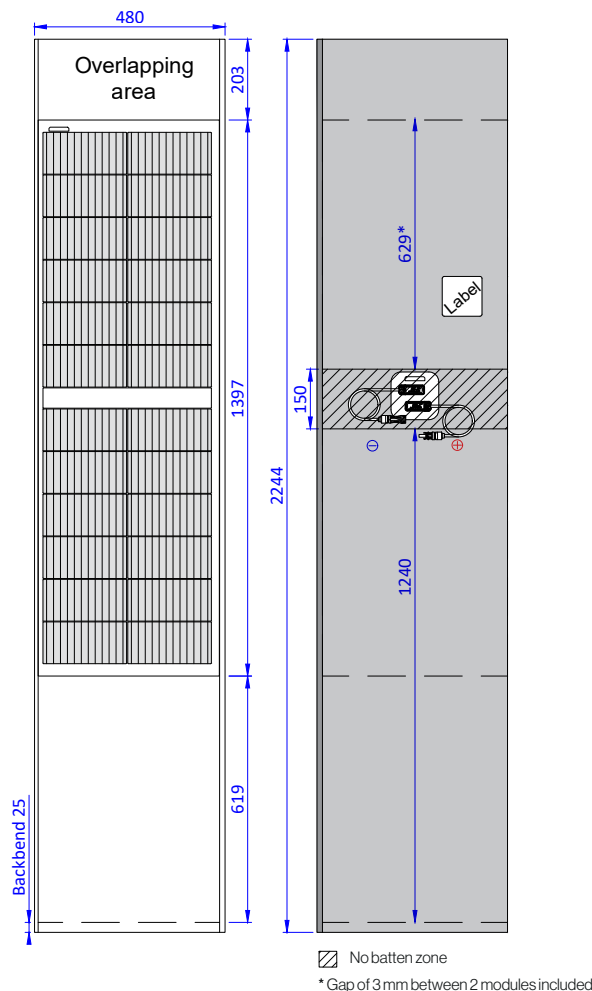


Electrical Characteristics

*Standard Test Conditions (irradiance 1000 W/m², cell temperature 25 °C, spectrum AM1.5)

		STC*
Nominal Power	P _{mpp} (W)	120
MPP Voltage	V _{mpp} (V)	15.2
MPP Current	I _{mpp} (A)	7.9
Open Circuit Voltage	V _{oc} (V)	17.6
Short Circuit Current	I _{sc} (A)	8.4
Module efficiency	η (%)	18.6

Power Tolerances ±3%

Current and Voltage Tolerances ±3%

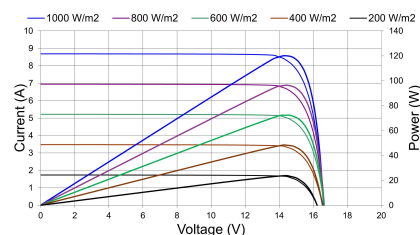

Thermal Characteristics

Temperature Coefficient of	P _{mpp}	-0.334 %/K
Temperature Coefficient of	V _{oc}	-0.259 %/K
Temperature Coefficient of	I _{sc}	0.049 %/K